
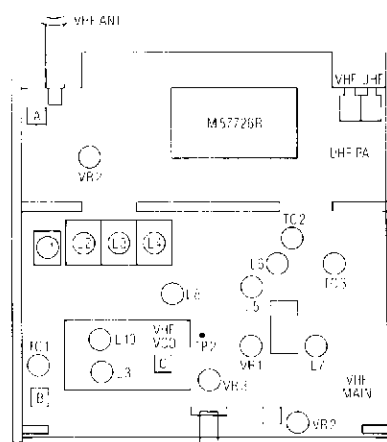


ADJUSTMENT

1. VHF Unit

ITEM	ADJUSTMENT POINT (S)	ADJUSTMENT METHOD
VCO VOLTAGE	Ⓒ L3, L10 (VCO BOX)	At 145.00MHz, adjust L3 so that the voltage of TP2 on B substrate is 3.0V. At 145.00MHz, pressing the PTT button, adjust L10 so that the voltage of TP2 on B substrate is 3.4V.
BASIC FREQUENCY	Ⓑ TC1	Pressing PTT button, adjust TC1 so that f-counter indicates 145.950 ± 0.1 kHz (T) or 144.950 ± 0.1 kHz (E) MHz.
TX POWER	Ⓑ TC2, 3	On "HI" position, pressing the PTT button, adjust TC2 and TC3 so that the power is maximum at 145.95MHz (T) or 144.95MHz (E).
POWER OUTPUT	Ⓐ VR2 (HI)	On "HI" position, turn VR2 for 45W output at 145.95MHz (T) or 144.95MHz (E). Verify the lightning of the entire RF meter.
	Ⓔ VR3 (MID)	On "MID" position, turn VR3 for 10W output at 145.95MHz (T) or 144.95MHz (E).
	Ⓕ VR4 (LO)	On "LO" position, turn VR4 for 5W output at 145.95MHz (T) or 144.95MHz (E).
DEVIATION	Ⓑ VR3	Enter the AF level of 0dBm, then pressing the PTT button, adjust VR3 so that you obtain 4.8kHz/Dev at 145.95MHz (T) or 144.95MHz (E) and AF 1kHz.
MIC GAIN	Ⓒ VR1	Enter the AF level of -46dBm, then pressing the PTT button, adjust VR1 so that you obtain 4.0kHz/Dev at 444.95MHz (T) or 434.95MHz (E) and AF 1kHz.
SUBAUDIBLE TONE DEVIATION (DR-590T)	Ⓒ VR2	Pressing the tone button at 145.95MHz, verify 0.6-0.8kHz/Dev at tone frequency of 88.5Hz.
1750Hz TONE DEVIATION (DR-590E)	Ⓒ VR2	Pressing the tone button, verify that the tone frequency is 1750Hz and the deviation is $3.5\text{kHz} \pm 0.2\text{kHz}$.
DESCRIMINATOR	Ⓑ L5, 6, 7	At 146.03MHz (T) or 145.03MHz (E) and 60 dB μ input, adjust L5, 6, 7 so that the distortion is minimum at 50mW.
SENSITIVITY	Ⓑ L1, 2, 3, 4, 8	Adjust L1, 2, 3, 4, 8 so that 12dB SINAD sensitivity is the highest at 146.03MHz (T) or 145.03MHz (E).
SQUELCH	Ⓑ VR2	At 146.03MHz (T) or 145.03MHz (E) and cut SG output. Adjust squelch knob point by VR2.
S-METER	Ⓑ VR1	At 145.03MHz (T) and 3-dB μ [EMF], adjust VR1 so that 2 in the S-meter begins to light.

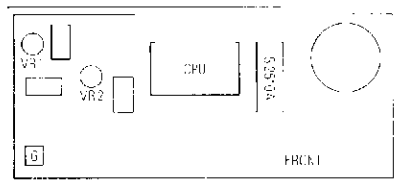

2. UHF Unit

ITEM	ADJUSTMENT POINT (S)	ADJUSTMENT METHOD
VCO VOLTAGE	Ⓔ L4 (VCO BOX)	At 445.00MHz (T) or 435.00MHz (E), adjust L4 so that the voltage of TP2 on E substrate is 4.0V (T) or 3.2V (E).
POWER OUTPUT	Ⓓ VR1 (HI)	On "HI" position, turn VR1 for 35W output at 444.95MHz (T) at 434.95MHz (E). Verify the lighting of the entire RF meter.
	Ⓘ VR3 (MID)	On "MID" position, turn VR3 for 8W output at 444.95MHz (T) or 434.95MHz (E).
	Ⓔ VR4 (LO)	On "I O" position, turn VR4 for 4W output at 444.95MHz (T) or 434.95MHz (E).
DEVIATION	Ⓔ VR2	Enter the AF level of 0dBm, then pressing the PTT button, adjust VR2 so that you obtain 4.8kHz/Dev at 444.95MHz (T) or 434.95MHz (E) and AF 1kHz.
MIC GAIN	Ⓒ VR1	Enter the AF level of -46dBm, then pressing the PTT button, adjust VR1 so that you obtain 4.0kHz/Dev at 444.95MHz (T) or 434.95MHz (E) and AF 1kHz.
SUBAUDIBLE TONE DEVIATION (DR-590T)	Ⓒ VR2	Pressing the tone button at 444.95MHz, verify 0.6-0.8kHz/Dev at tone frequency of 88.5Hz. Adjust VR2.
1750Hz TONE DEVIATION (DR-590E)	Ⓒ VR2	Pressing the tone button, verify that the tone frequency is 1750Hz and the deviation is 3.5kHz \pm 0.2kHz. Adjust VR2.
HELICAL FILTER	Ⓘ IC1, TC2 L1, L2	Connect the output of a tracking generator to the antenna and spectrum analyzer to TP1 the adjust TC1, 2 and L1, 2 so that the sensitivity is at its peak between 440 and 450MHz at maximum gain. (570E: 430-440MHz)
DISCRIMINATOR	Ⓔ L3, L5	At 445.03MHz (T) or 435.03MHz (E) and 60 dB μ input, adjust L3, L5 so that the distortion is minimum at 50mW.
SQUELCH	Ⓔ VR1	At 445.03MHz (T) or 435.03MHz (E) and cut the SQ output power. Adjust squelch knob point by VR1.
S-METER	Ⓔ VR5	At 445.03MHz (T) or 435.03MHz (E) and 3-dB μ [EMF], adjust VR5 so that 2 in the S-meter begins to light.

